

AC series

# ALLU AC 8-15



- Demolition
- Excavation
- Construction
- Utility and Road Works
- Concrete Waste Recycling
- Crushing & Recycling Bricks, Ceramic etc.
- Asphalt Recycling
- Waste Rock Handling

## Effectively crush and recycle troublesome materials

The ALLU AC 8-15 is a purpose built screener crusher bucket that enables hard rock and often troublesome demolition materials and construction debris to be effectively reduced onsite and less material sent to landfill.

The AC 8-15 essentially functions as a jaw crusher or a primary crushing tool, allowing the excavator or wheel loader to process and recycle materials onsite.

By crushing and recycling materials onsite, the AC 8-15 minimises the need for transportation of waste and reduces the need for virgin materials.

## Quickly change the material output size

The AC 8-15 has a unique feature allowing the discharge size to be changed in 3 to 5 minutes by simply removing the adjusting pin in the back and repositioning it to one of the numbered holes on the frame.



## Less jamming and bridging

Another unique feature of the AC 8-15 is its jaw that can be run in both directions, which helps avoid jamming or bridging of the material, even with wet materials.

With the bottom eccentric jaw movement material can flow freely through the jaws increasing the capacity of the material output and reverse mode allows to keep the jaws clean.

AC series

# ALLU AC 8-15



## AC 8-15 key specs



weight  
**1,400 kg**



carrier weight  
**8-11 t** (excavator)



loading capacity  
**0.35m<sup>3</sup>**

## ALLU AC 8-15 specifications


Excavator weight (t)	8 - 11
Loading capacity (m <sup>3</sup> )	0.35
Crushing cam opening (mm)	260
Output size (mm)	0-16 to 0-200
Max operation flow (lpm)	80
Operating pressure (bar)	250
Weight (kg)	1,400

Check carrier allowed attachment weight from carrier manufacturer. Check application requirements.

*Specifications are subject to change without notice.*

## 16 Different Fragment sizes

Feed opening	370mm
Min discharge	0 - 16mm
Max discharge	0 - 200mm

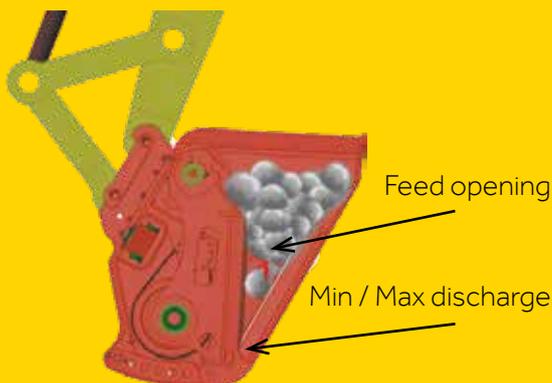

## Features



1. Main frame
2. Upper jaw
3. Crushing plates\*
4. Bucket with streamlined frame design
5. Angled tip plate
6. Pin adjustable and changeable fragment size
7. Belt drive and fly wheel are protected, placed inside the bucket - maintenance or adjustments not required

\* bucket opens like a clam enabling easy and safe crushing plate replacement

## Benefits

- Higher excavator utilization rate
- Less material to a landfill means less expenditure
- Reductive pollution, decreased transportation and fuel costs
- Easy to handle, also in tight and limited areas
- Quickly put into operation
- No need for logistics, or permissions
- Easy fragment size change