RAMMER RSS08R SCRAP SHEAR

HYDRAULIC ROTATION WITH PROTECTION VALVE
The protected rotation system allows precision tool placement, lowering/reducing owning and operating costs.

BOLT ON, SYMMETRICAL CUTTER BLADES
Field replaceable and adjustable cutter blades minimize down-time and significantly increase the working life of wear parts

SMART JAWS DESIGN FEATURING DOUBLE GUIDE
Avoids material to stuck between the jaws which increases productivity and cutting capacity

HYDRAULIC CYLINDER SHIELDING
The cylinders are fully protected throughout the working cycle. Increasing durability and extending service intervals.

REPLACEABLE PIERCING TIP
A bolt on piercing tip, removes the need for welding and rebuilding which lowers the cost of owning and operation.

FIELD REPLACEABLE AND ADJUSTABLE CENTRAL PIN
Enables the operator to maintain the product on site, which keeps the cutting capacity at a maximum level.

RSS SCRAP SHEARS

The RSS Scrap Shears can be used in every industrial demolition job involving the cutting and recovery of ferrous materials such as iron sections, pipes, tanks, railway carriages etc

Rammer®

RSS08R

SPECIFICATIONS

Working weight, stick mounted, kg	650
Working weight, boom mounted, kg	670
Operating pressure, bar	250-300
Oil flow range, l/min	80-100
Rotation working pressure, bar	90-100
Rotation oil flow, l/min	15-20
Carrier weight stick mounted, ton	6-9
Carrier weight boom mounted, ton	4-6

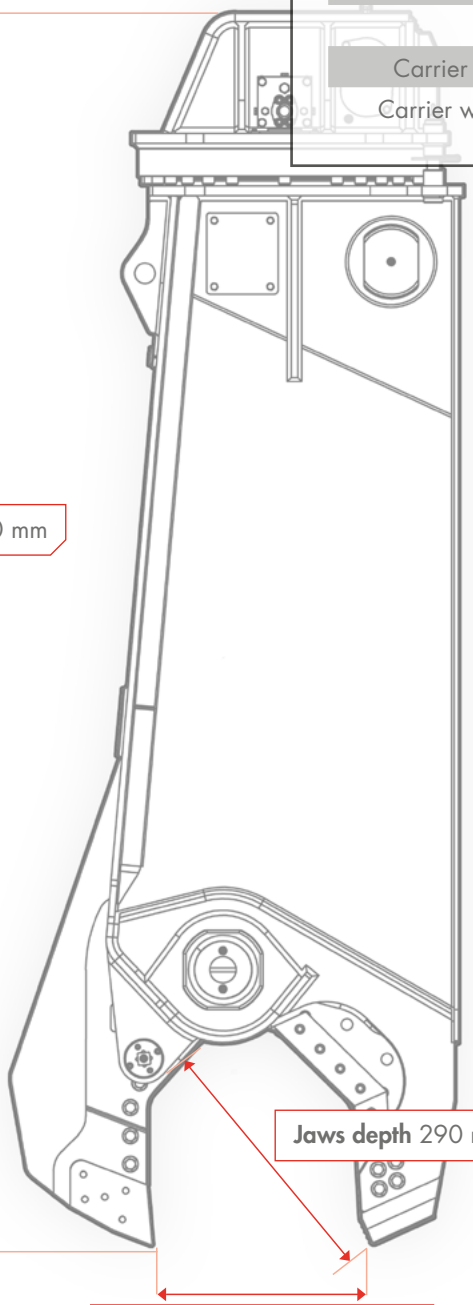

Sandvik Mining and Construction Oy
Taivalkatu 8, P.O.Box 165
FI- 15101 Lahti, Finland
Phone Int. +358 205 44 151
www.rammer.com